


Fig. 1

2/3

Fig. 2

CDB CDB......SCSI Command Descriptor Block
Data buffer Depending on the CDB the
bufferlength can be a value >= 0

Fig. 4

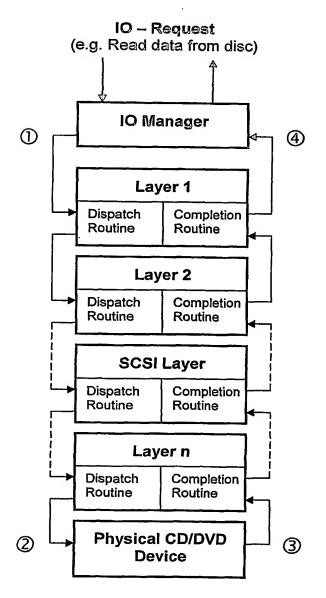

- 1 IO Manager calls the Dispatch Routine of every layer, starting with layer 1.
- 2...... The last layer is accessing the physical device.
- 3 After the physical device is finished, the IO Manager calls the Completion Routine of every layer, starting with the last one.
- 4 After the 1st layers completion routine has completed the IO Request is finished.

Fig. 3